


# ACCESS COVERS

## GRANSPRUNG

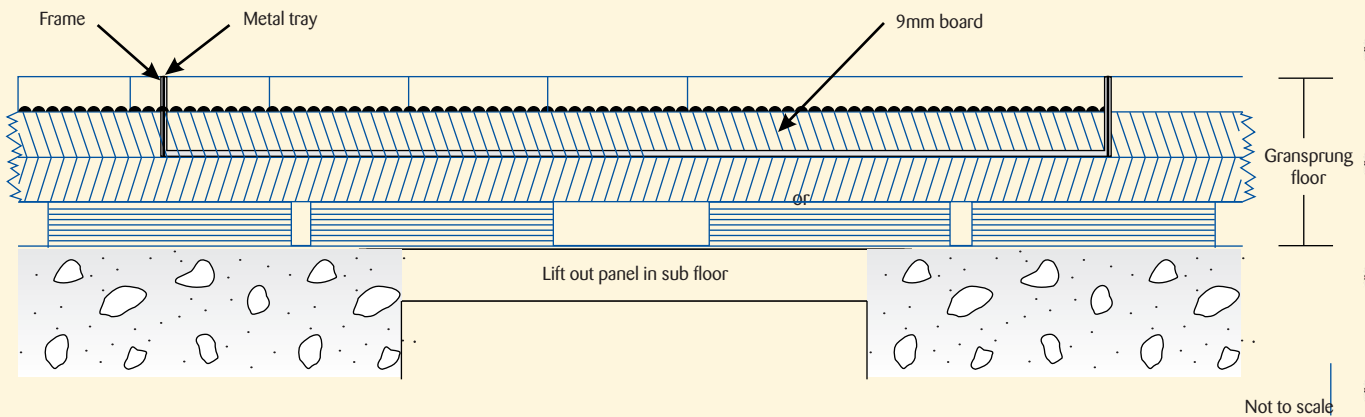


### Notes

1. All access covers are made to individual order.
2. The top surface of the lift out panel in the sub floor must be flush with the top of the sub floor.
3. The lift out panel in the sub floor should be capable of supporting the loads which the Gransprung floor is expected to experience. The use of timber is not recommended.
4. Maximum access cover size in the surface of the Gransprung floor is 650 x 400mm.
5. The use of multiple access covers for larger openings is an option but duct cover runs are not recommended in a sprung floor, particularly one to be used for sport. Please refer to our technical department.
6. To allow for the removal of the lift out panel in the sub floor, the access panel in the Gransprung floor needs to be 200mm longer and 200mm wider than the overall void in the sub floor.
7. Each Gransprung access cover will be fitted with a pair of lifting lugs. One pair of lifting keys will be provided for each Gransprung floor fitted with access covers.
8. Access covers are not available in Gransprung Hi-Load.

**TECHNICAL SALES HELPLINE: 01773 606060**

# ACCESS COVERS

## TRADITIONAL GRANWOOD

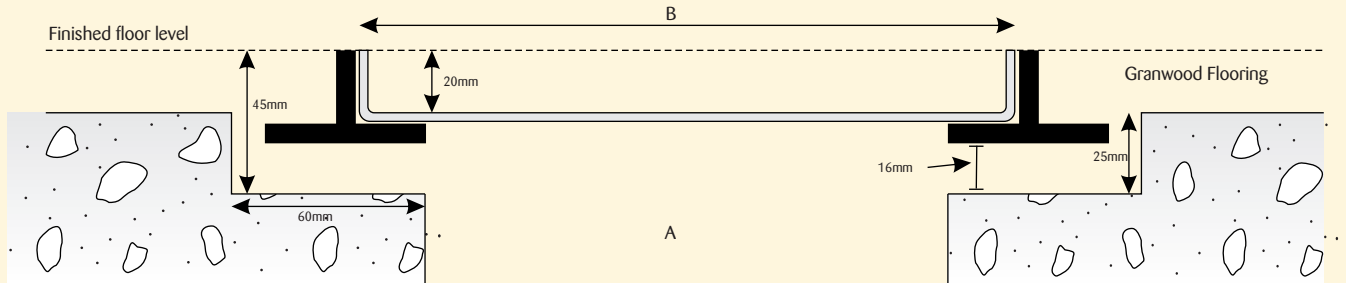

Not to scale

Duct width : A

Cover width :  $B = A + 50\text{mm}$

Maximum cover length : 600mm

### Notes

1. All access covers are made to individual order.
2. Standard access covers are suitable for distributed loadings up to  $5.0 \text{ KN/m}^2$ . Heavier duty covers are available. Please refer to our technical department for details.
3. Standard access covers are manufactured from steel and frames from aluminium. Other materials are available to special order.
4. Heavier duty access covers would be required for duct widths in excess of 450mm.
5. Continuous duct cover runs can be supplied if required.
6. Individual access covers are supplied with a pair of lifting lugs. With continuous duct cover runs, every fourth cover is fitted with lifting lugs. One pair of lifting keys is supplied with every five covers which are fitted with lifting lugs.



QUALITY BRITISH FLOORS FOR EVERY LOCATION

### Granwood Flooring Limited

Sales Office  
PO Box 60  
Alfreton  
DE55 4ZX

Sales Tel: 01773 606060  
Contracts Tel: 01773 602341  
Fax: 01773 606030  
[www.granwood.co.uk](http://www.granwood.co.uk)

